

FIG. 1

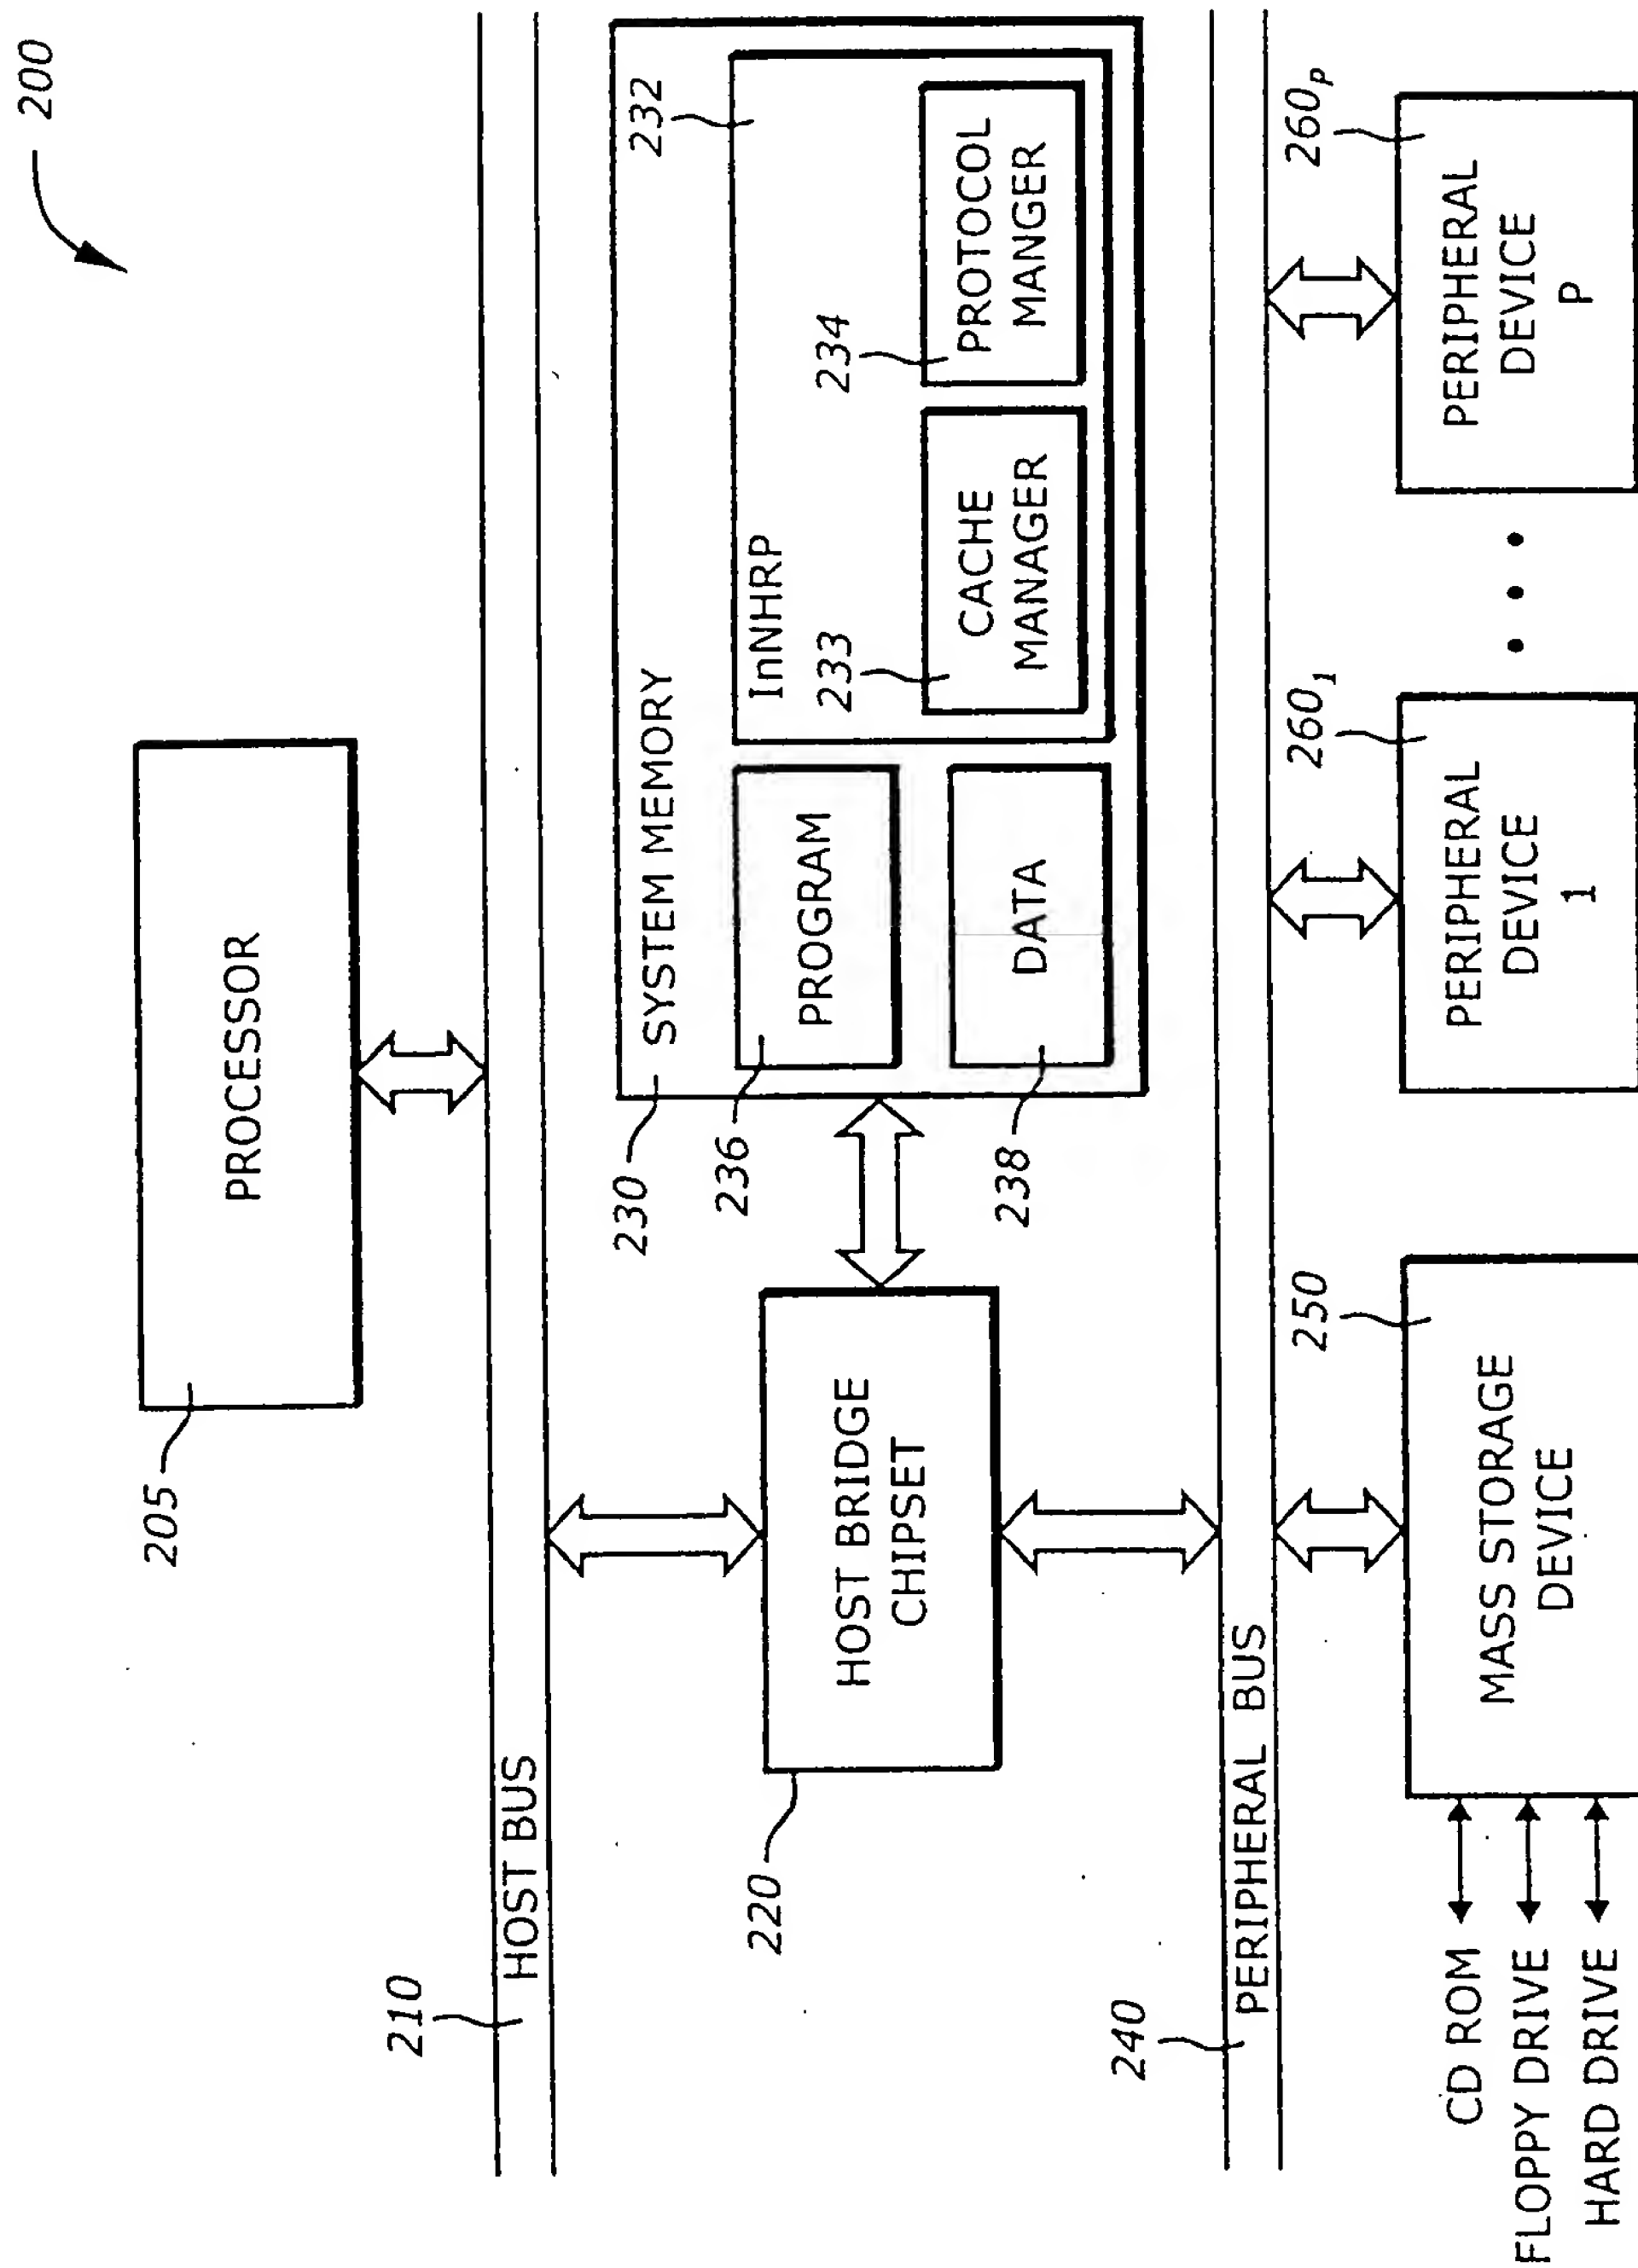


FIG. 2

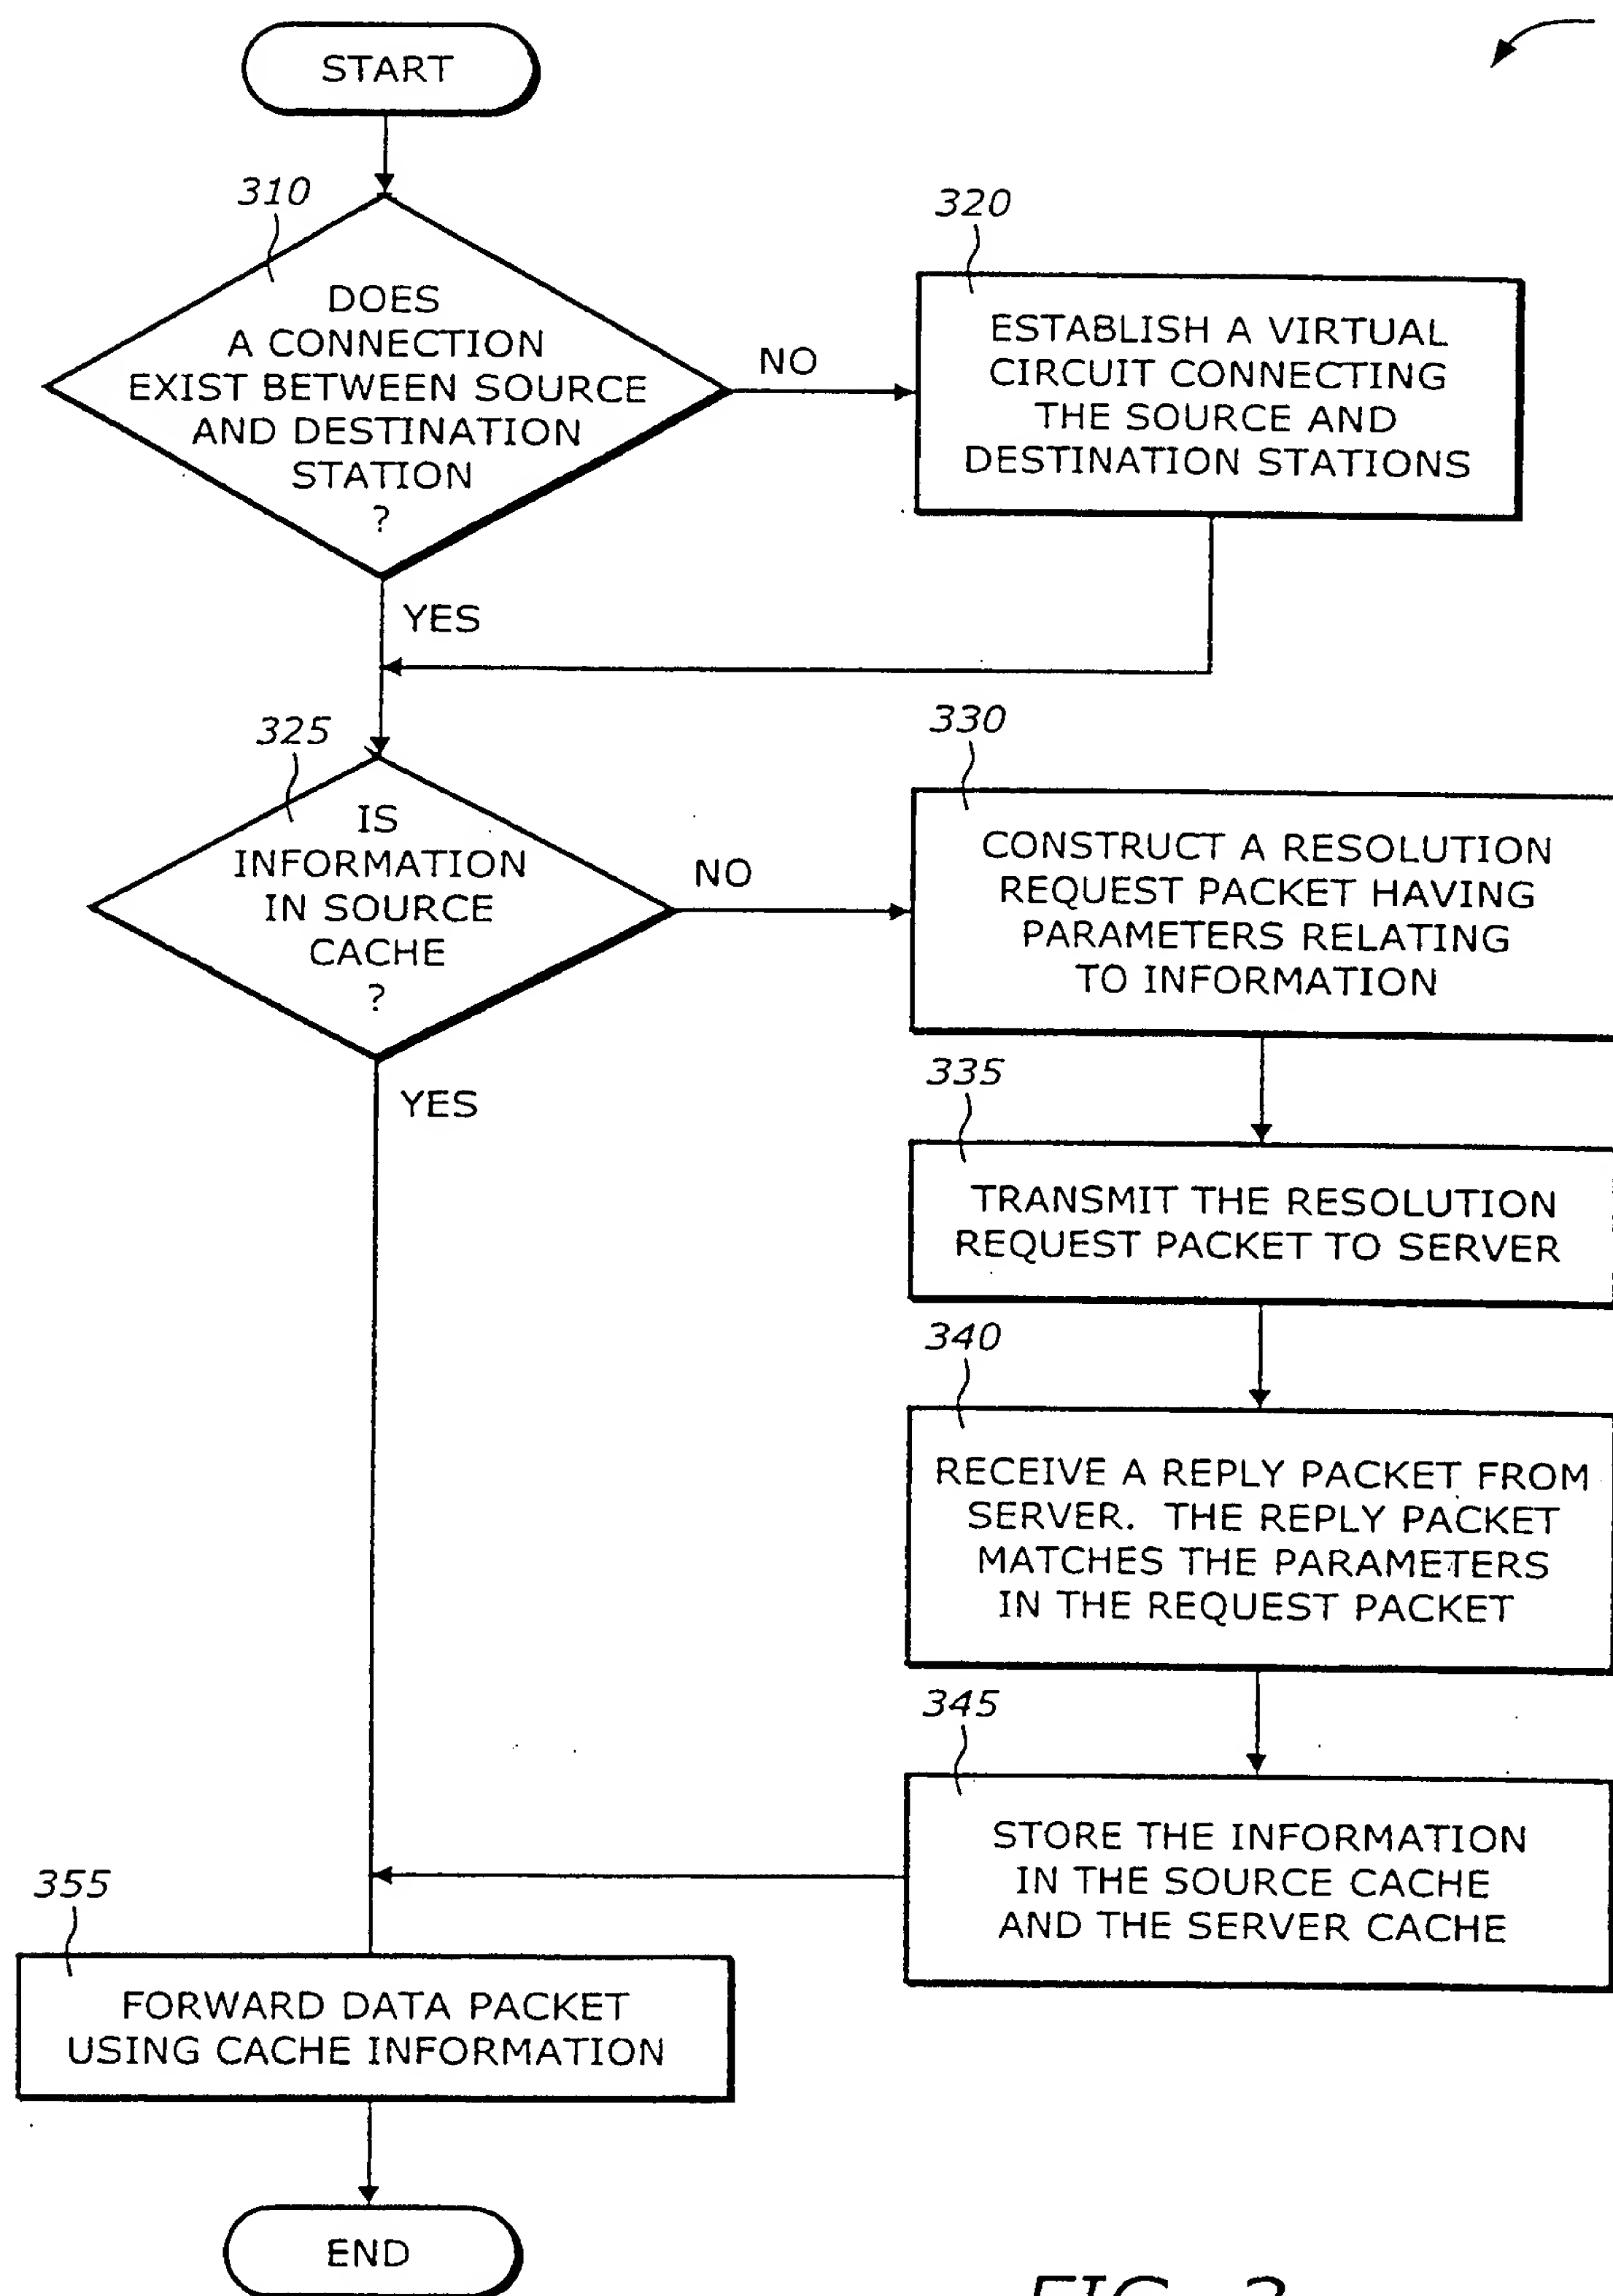


FIG. 3

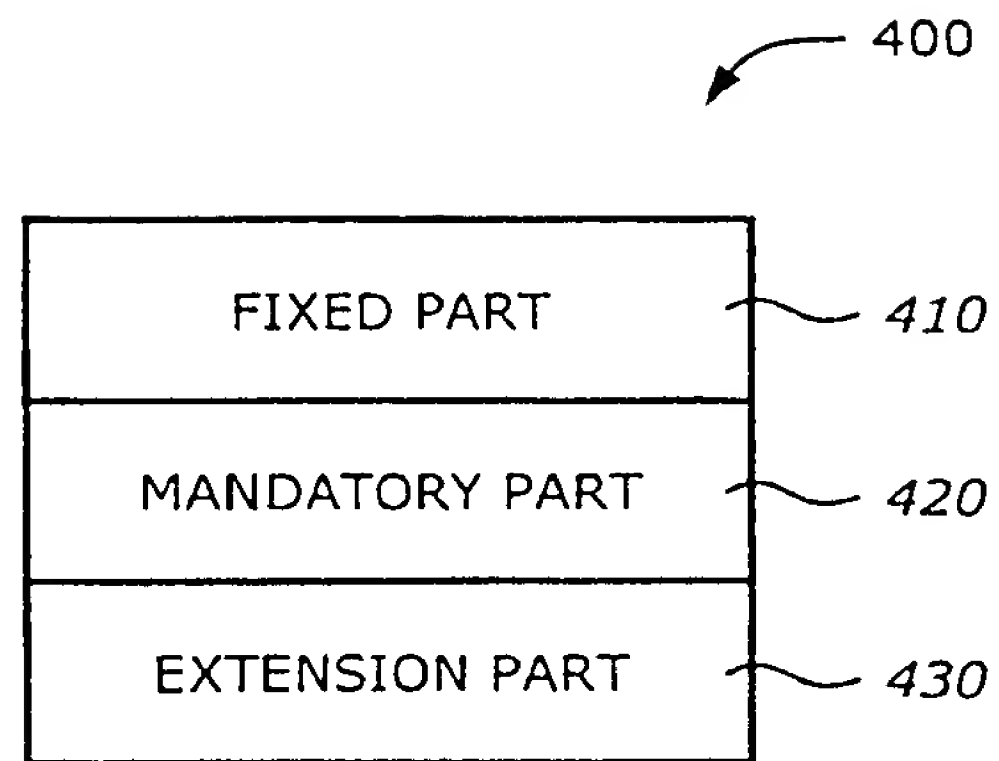


FIG. 4

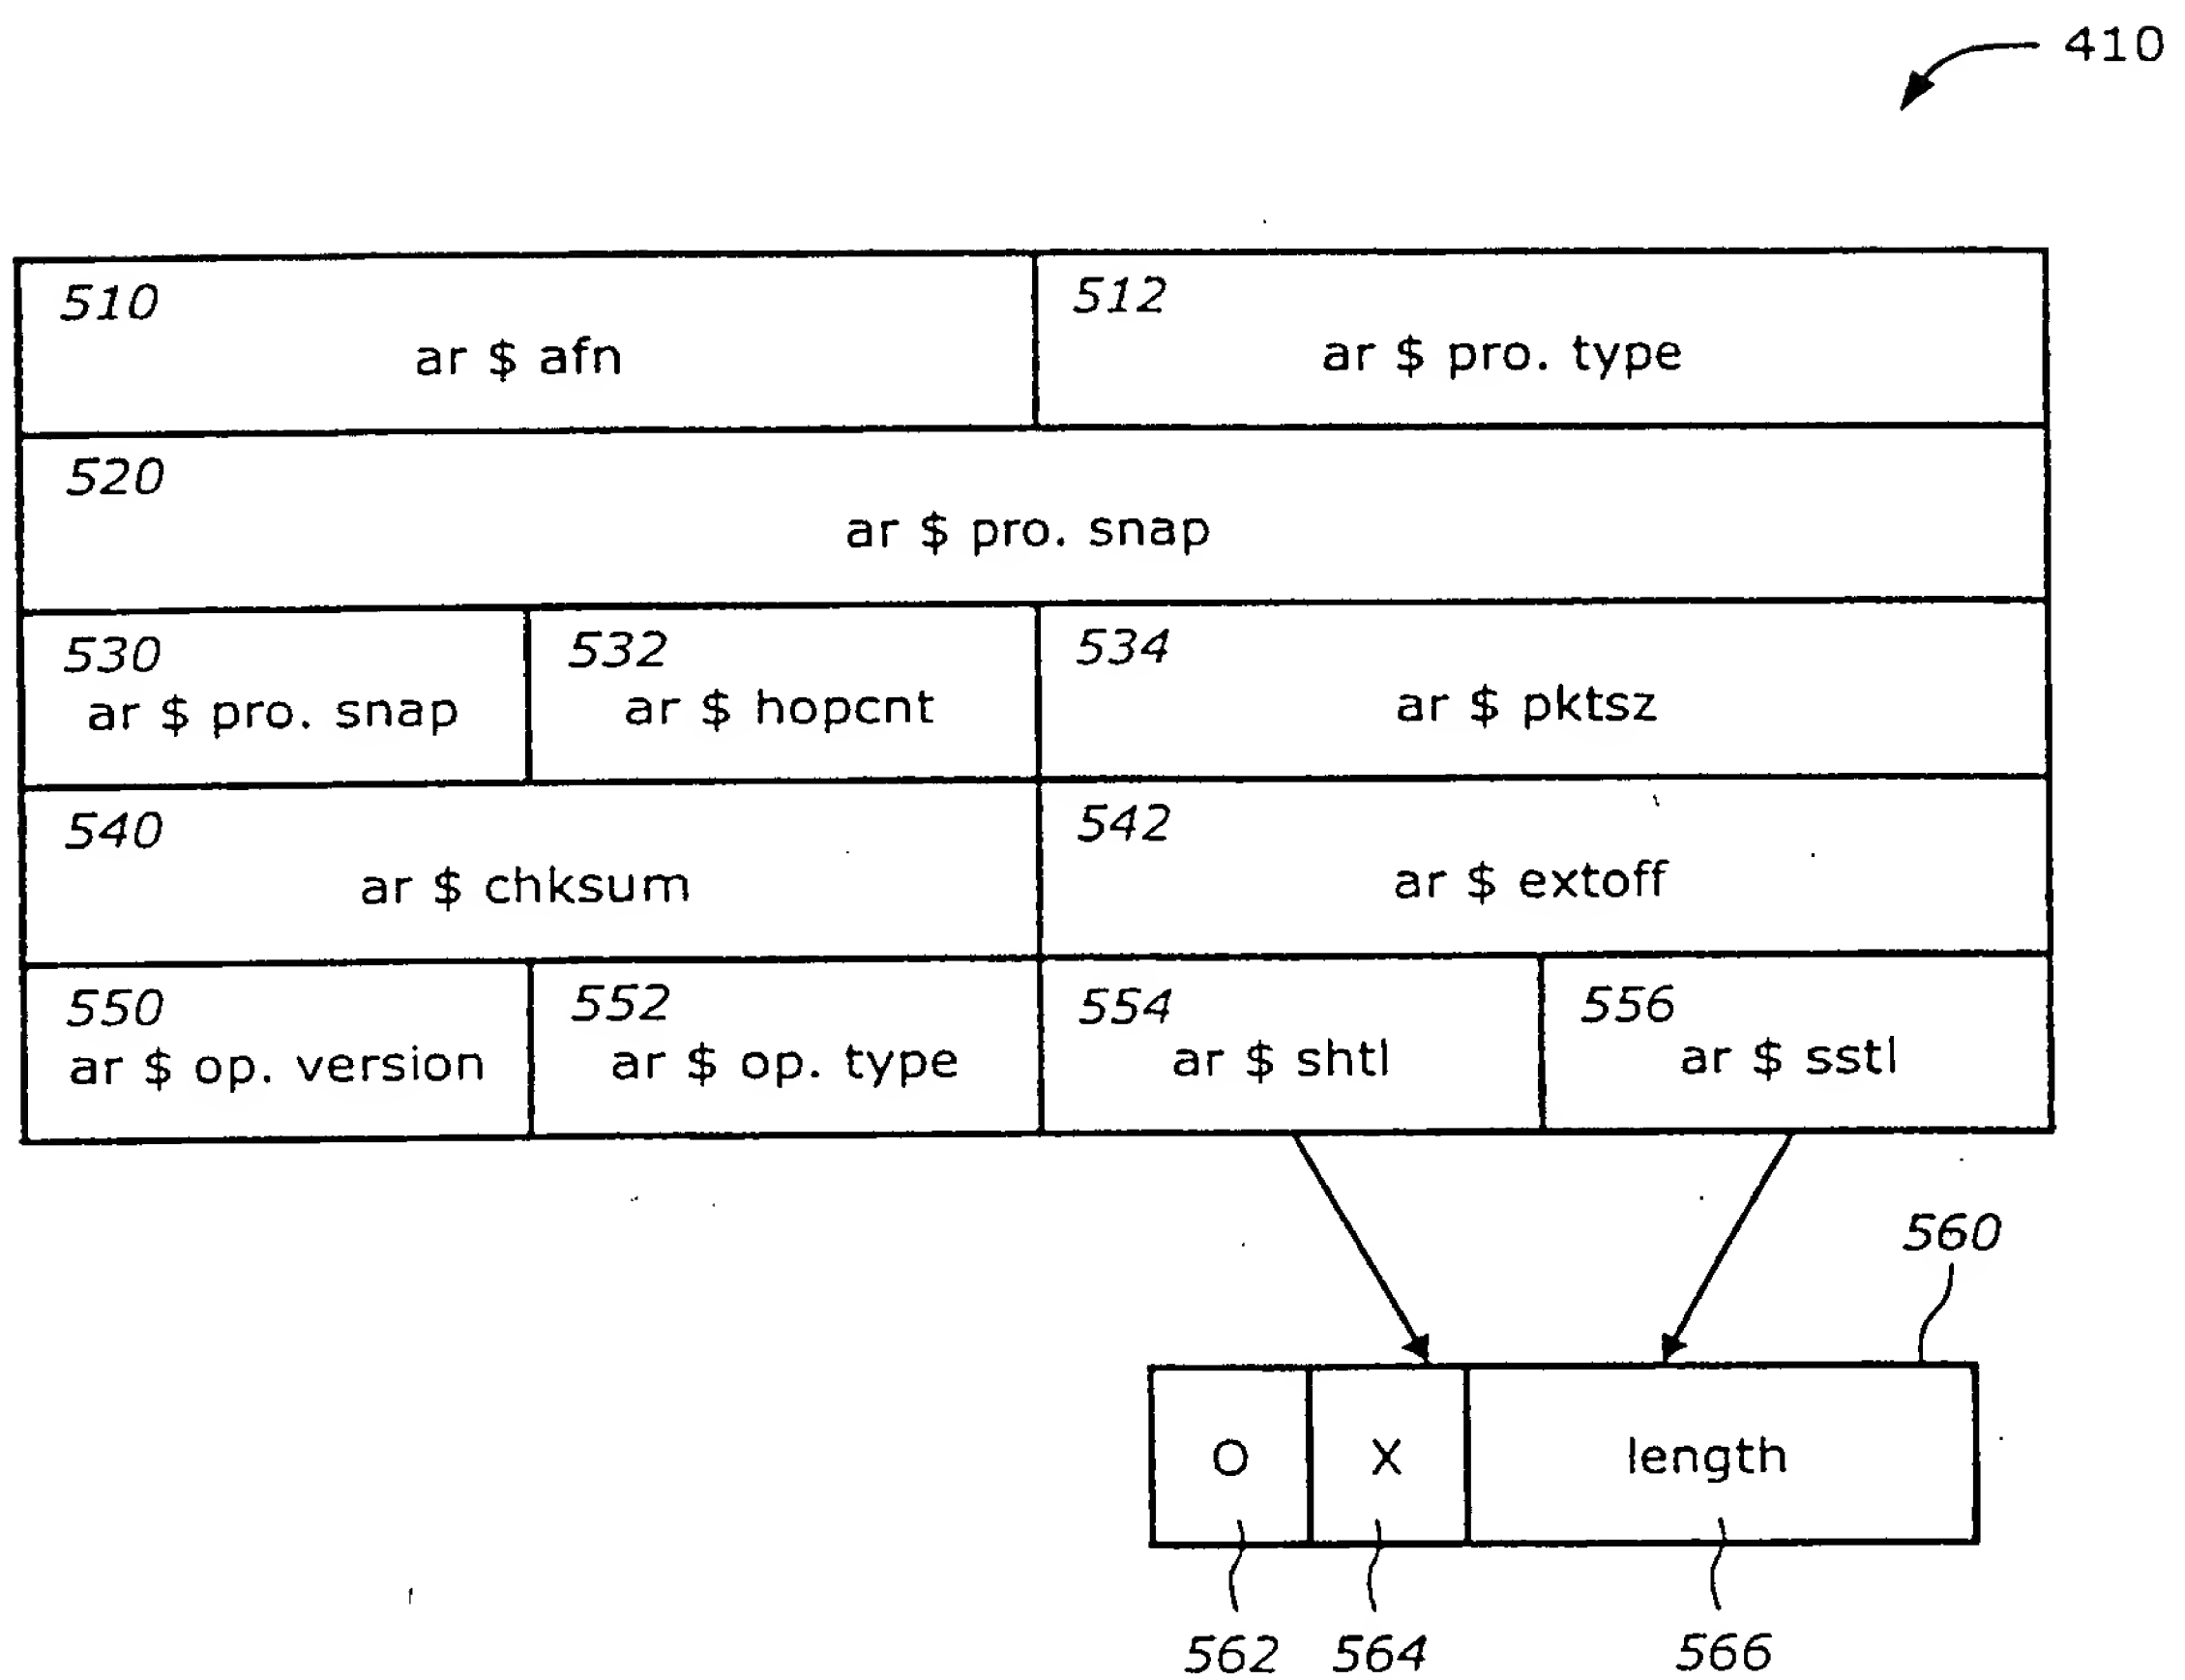


FIG. 5

420

610 SRC PROTO LEN	620 DST PROTO LEN	620 FLAGS		} COMMON HEADER 601
618 REQUEST ID				
620 SOURCE NBMA ADDRESS (VARIABLE LENGTH)				
622 SOURCE NBMA SUBADDRESS (VARIABLE LENGTH)				
624 SOURCE PROTOCOL ADDRESS (VARIABLE LENGTH)				
626 DESTINATION PROTOCOL ADDRESS (VARIABLE LENGTH)				
630 CODE	632 PREFIX LENGTH	634 UNUSED		} CLIENT INFORMATION ENTRY 602
636 MAXIMUM TRANSMISSION UNIT		638 HOLDING TIME		
640 CLI ADDR T/L	642 CLI SADDR T/L	644 CLI PROTO LEN	646 PREFERENCE	
650 CLIENT NBMA ADDRESS (VARIABLE LENGTH)				
652 CLIENT NBMA SUBADDRESS (VARIABLE LENGTH)				
654 CLIENT PROTOCOL ADDRESS (VARIABLE LENGTH)				
• • •				

FIG. 6

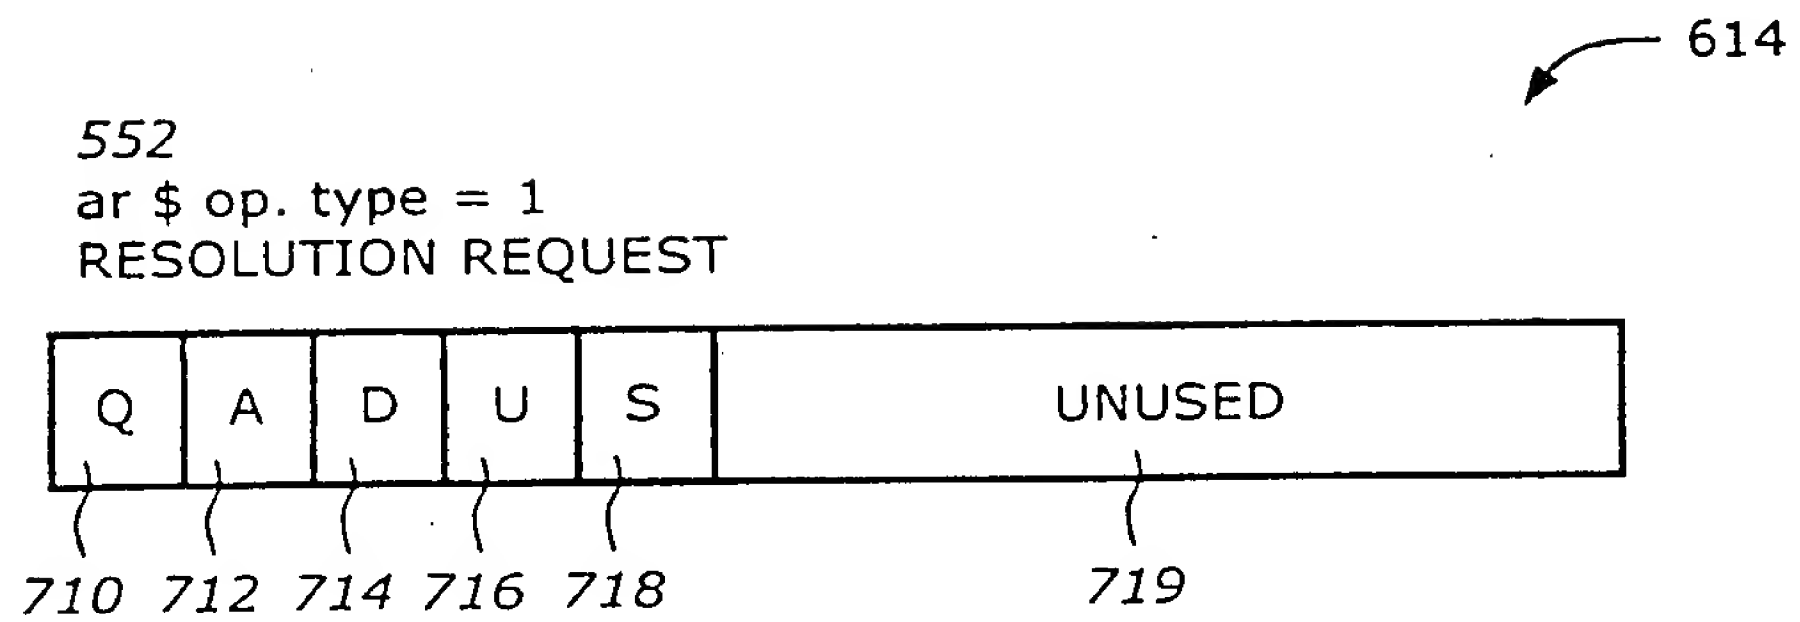


FIG. 7A

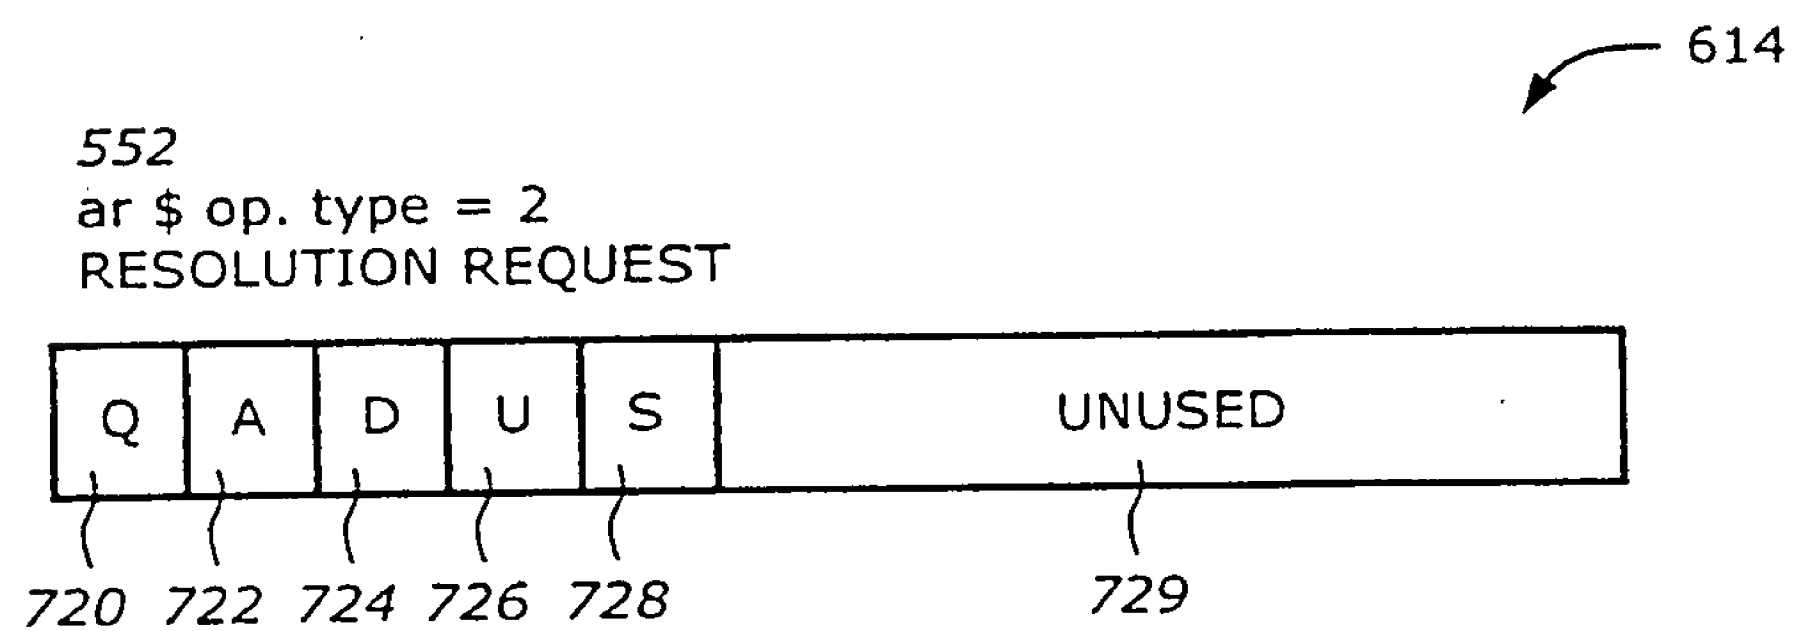


FIG. 7B

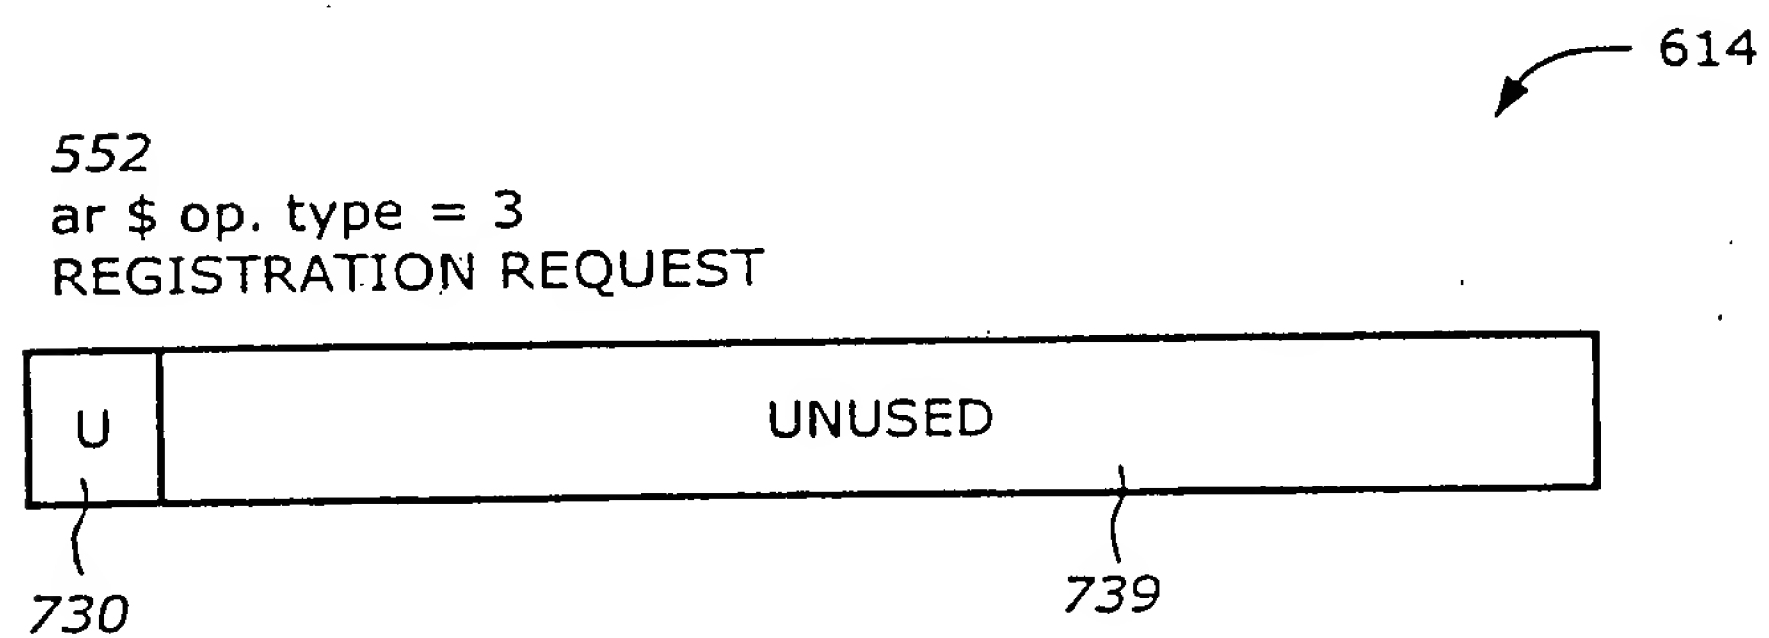


FIG. 7C

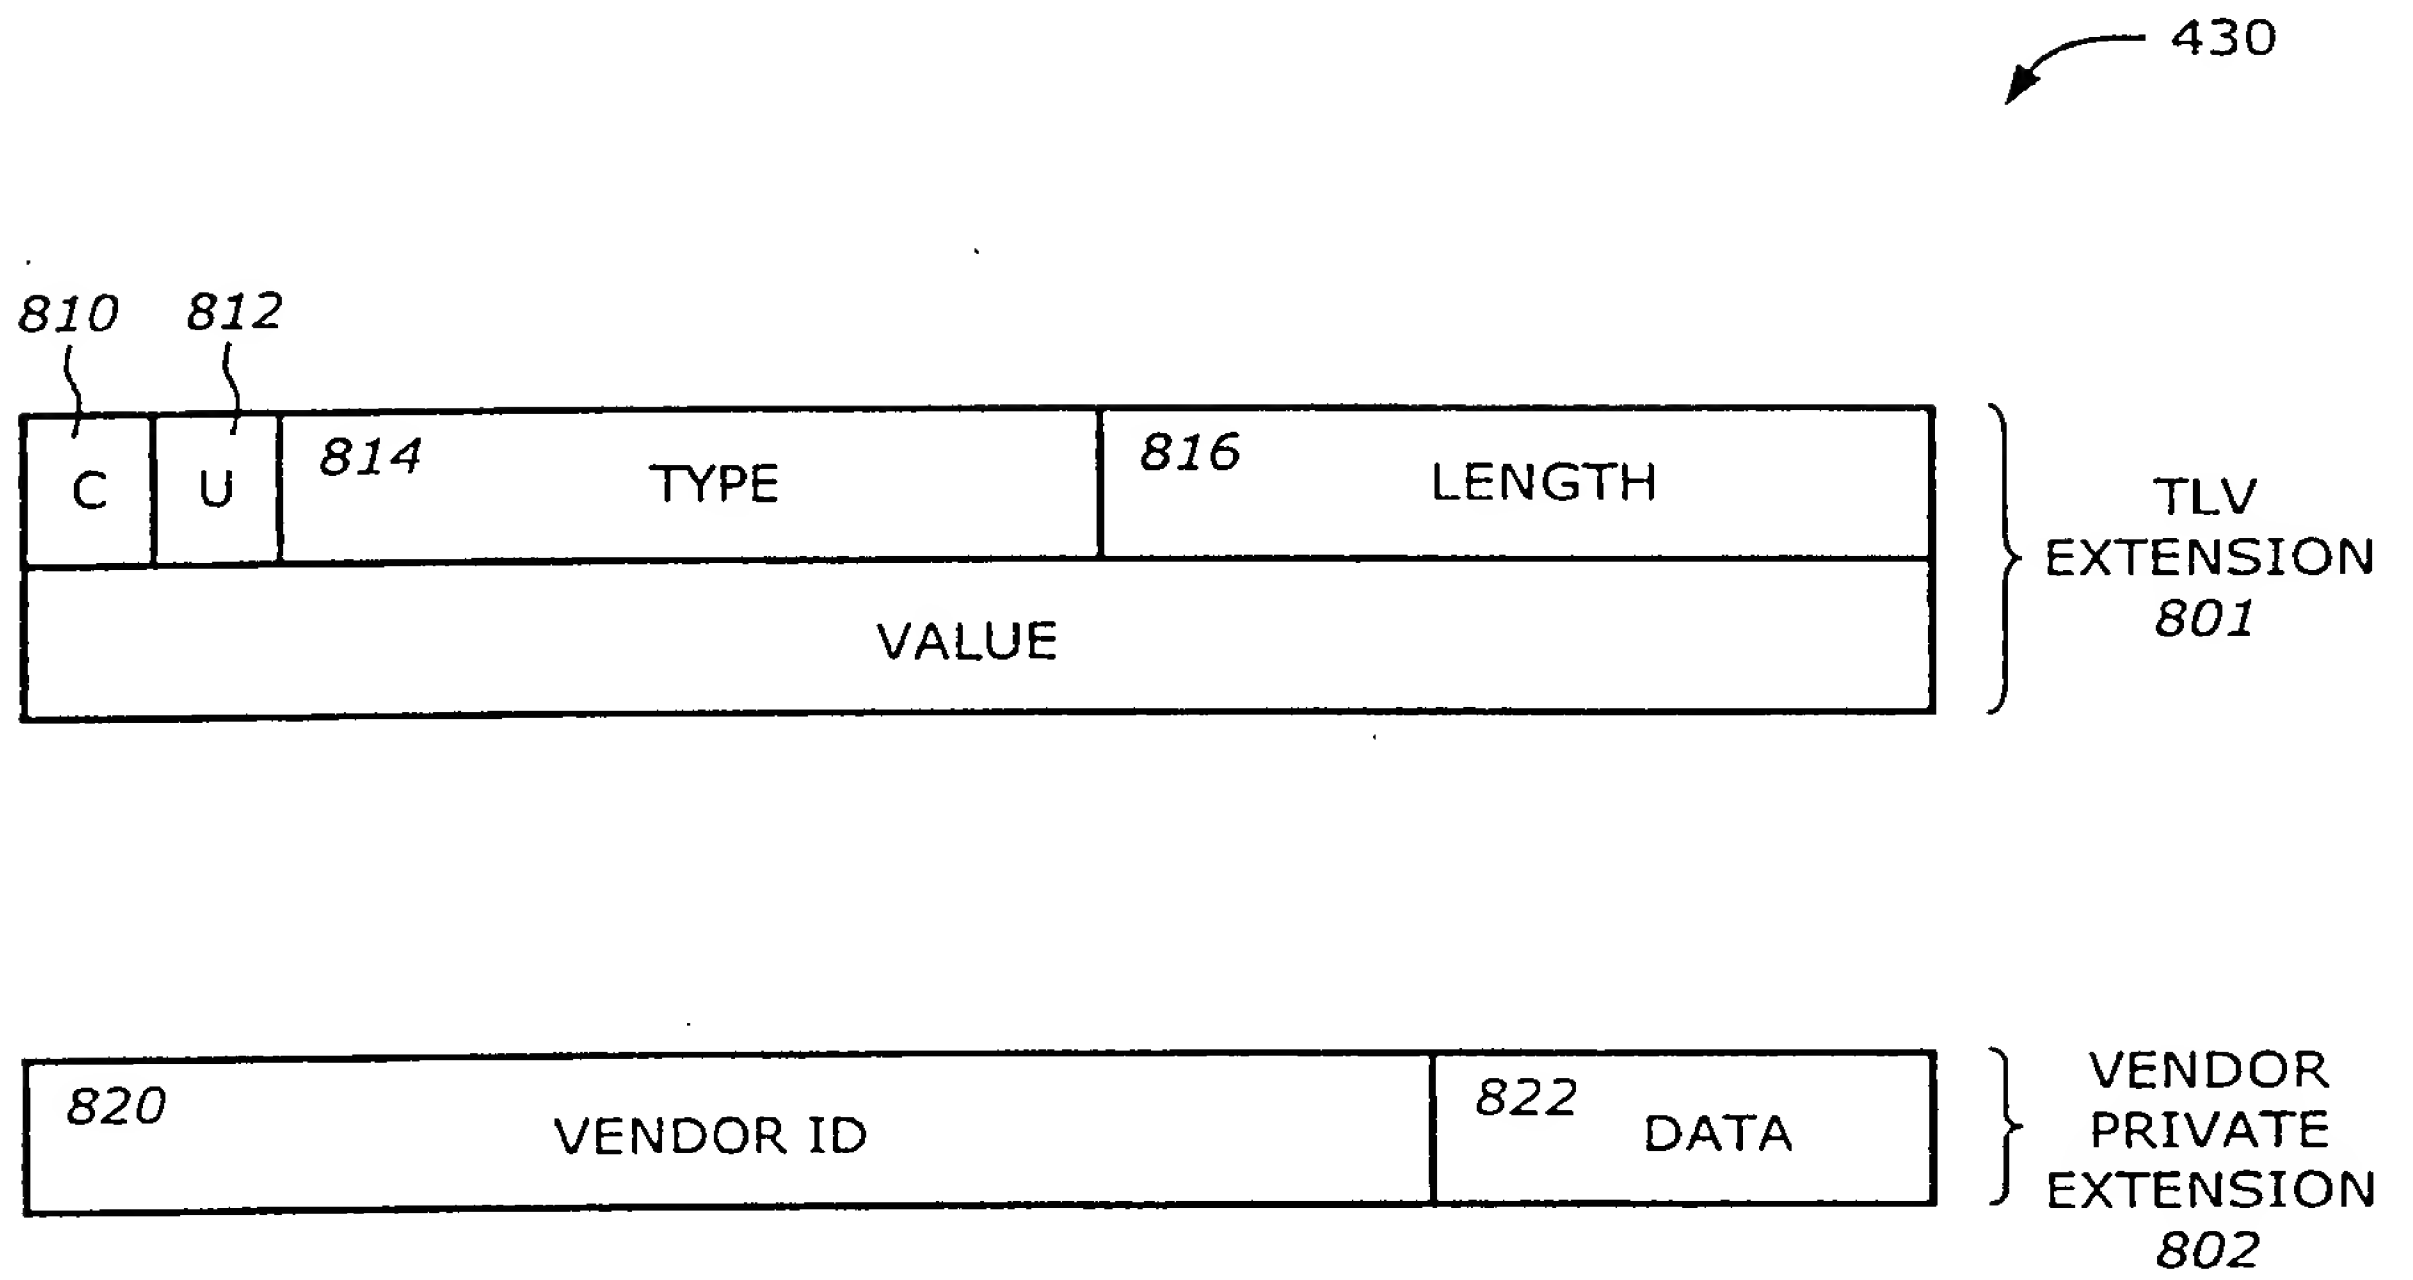


FIG. 8